

Technical Specifications



	220 watt	210 watt	200 watt
Power (Pm) in Watts (nominal)	220 (0 ~+3%)	210 (0 ~+3%)	200 (0 ~+3%)
Open Circuit Voltage (Voc) in Volts	33	32.5	32.5
Short Circuit Current (Isc) in Amps	8.47	8.43	8.10
Voltage at Maximum Power (Vmp) in Volts	27	26.5	26.3
Current at Maximum Power (Imp) in Amps	8.15	7.93	7.60
Maximum System Voltage	1000V	1000V	1000V
Solar Cells per Module (Units)	54	54	54
Length x Width x Thickness (L x W x T) mm	1480 x 986 x 35		
Weight – Kg	16.00		
Mounting Holes Pitch (Y) – mm	915		
Mounting Holes Pitch (X) – mm	954		
Area – Sq. M	1.45		
Junction Box	Ip65/4T with Play & Plug connector		

All electrical parameters specified at STC: 25°C cell temperature; 1000W/M² irradiance; AM 1.5


Construction Features

Type of cell	156 X 156mm Multi-Crystalline Si
Glass	Tempered & Low Iron
Encapsulate	Ethylene Vinyl Acetate
Frame	Anodized Aluminum
Junction Box	Weather Proof Nylon 6


Warranty

05 years Product Warranty
12 years – 90% of Power
25 Years – 80% of power

I-V Curve at STC

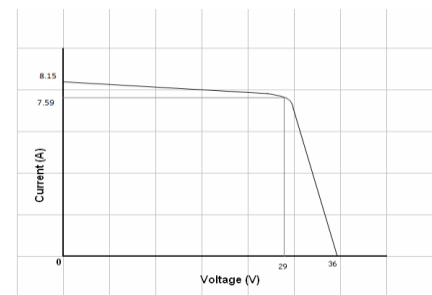

Mounting Details

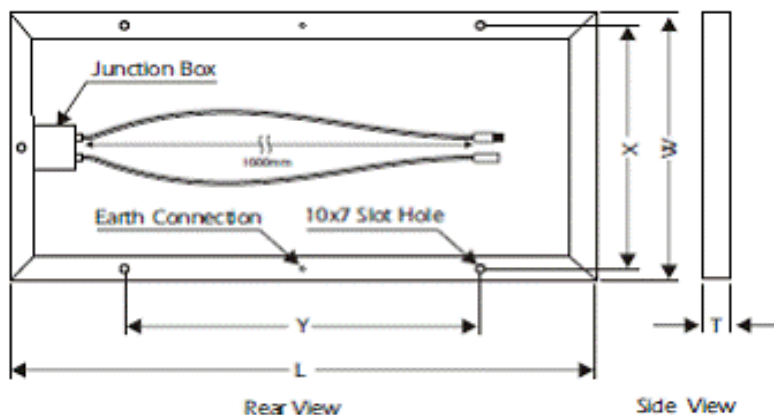

Temperature Coefficient

Voltage	-0.35% / °C
Current	0.10% / °C
Power	-0.47% / °C
NOCT	47+/-2 °C

*Due to constant product modifications, PHOTONIX reserves the right to amend the above specifications without prior notice

PHOTONIX SOLAR PRIVATE LIMITED

Plot No 38/A, Sahakar Vrind Society, Paud Road, Opp. Vanaz Factory, Kothrud Pune 411038

Ph: +91-20-25382926, Skype: pnx.pune