

Electrical Characteristics	PNX-45	PNX-50	PNX-60	PNX-70	PNX-74	PNX-75	PNX-80
Power (Pm) in Watts (Nominal)	45	50	60	70	74	75	80
Open Circuit Voltage (Voc) in Volts	21	21	21	21	21.5	21.5	22
Short Circuit Current (Isc) in Amps	2.80	3.10	3.70	4.35	4.45	4.50	4.70
Voltage at Maximum Power (Vmp) in Volts	17	17	17	17	17.5	17.5	18
Current at Maximum Power (Imp) in Amps	2.65	2.90	3.50	4.10	4.22	4.28	4.45
Maximum System Voltage	1000V	1000V	1000V	1000V	1000V	1000V	1000V
Solar Cells Per Module (Units)	36	36	36	36	36	36	36
Length x Width thickness in mm	555 x 665 x 35		675 x 665 x35	845 x 665 x 35			
Weight - KG	4.0		5.0	6.5			
Mounting Holes Pitch (Y) - mm	275		355	430			
Mounting Holes Pitch (X) - mm	633		633	633			
Area - Sq. M	0.35		0.44	0.56			
Junction Box (Terminals)	2T						


Construction Features

Type of cell	Multi-Crystalline Si
Front Face	Tempered Glass & Low Iron
Encapsulate	Ethylene Vinyl Acetate
Frame	Anodized Aluminium
Junction Box	Weather Proof Nylon 6

Certifications: IEC 61215 / IEC 61730-1 / IEC 61730-2
 All modules are supplied with screw less Hollow section frames
 Warranty: Limited Extended warranty up to 10 years

*Due to constant product modifications, PHOTONIX reserves the right to amend the above specifications without prior notice

Mounting Details

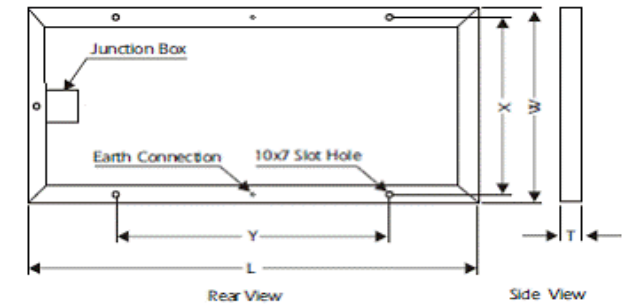

PHOTONIX SOLAR PRIVATE LIMITED

Plot No 38/A, Sahakar Vrind Society, Paud Road, Opp. Vanaz Factory, Kothrud Pune 411038

Ph: +91-20-25382926, Skype: pnx.pune

www.photonixsolar.com